
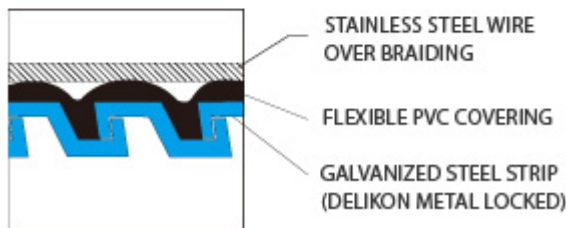


**Water Proof Over Braided Flexible Metal Conduit ( YF-704 )**

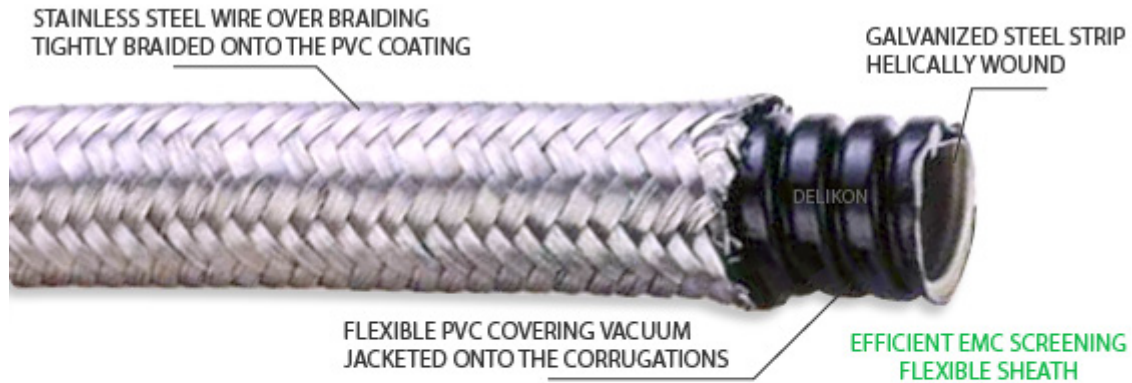

- \*Water-tight
- \*EMI / RFI Shielding
- \* Highly flexible. Tensile Stresses Resistant
- \*Abrasion & Hot Metal Splashes Resistant

Type	Trade Size	I.D. (mm)		O.D. (mm)		Min Bending Radius (mm)	Meter/Coil
		Min.	Max.	Min.	Max.		
YF-70400	5mm	<b>4.8</b>	5.3	<b>9.3</b>	9.9	40	100
YF-70401	8mm	<b>8.0</b>	8.4	<b>13.0</b>	13.4	50	100
YF-70402	1/4"	<b>9.7</b>	10.2	<b>15.4</b>	15.7	60	100
YF-70403	3/8"	<b>12.3</b>	12.8	<b>18.5</b>	19.0	70	50
YF-70404	1/2"	<b>15.7</b>	16.3	<b>21.8</b>	22.3	90	50
YF-70406	3/4"	<b>20.7</b>	21.2	<b>27.2</b>	27.7	110	50
YF-70410	1"	<b>26.2</b>	26.8	<b>33.7</b>	34.4	150	50
YF-70412	1-1/4"	<b>34.7</b>	35.4	<b>42.5</b>	43.2	175	30
YF-70414	1-1/2"	<b>40.0</b>	40.6	<b>48.4</b>	49.3	200	25
YF-70420	2"	<b>51.3</b>	51.9	<b>60.4</b>	61.3	230	20
YF-70424	2-1/2"	<b>62.9</b>	63.6	<b>73.1</b>	74.0	250	10
YF-70430	3"	<b>77.9</b>	78.7	<b>88.8</b>	89.9	300	10
YF-70440	4"	<b>101.6</b>	102.6	<b>114.2</b>	115.3	500	10
YF-70450	5"	<b>125.0</b>	127.0	<b>141.0</b>	144.0	580	5
YF-70460	6"	<b>150.0</b>	153.0	<b>166.0</b>	169.0	650	5

Over braided pvc jacketed flexible metal conduit provides high resistance against wear. Resistant to most types of oils and greases, this flexible sheath is extremely flexible and have excellent levels of mechanical resistance. Over braided flexible conduit also offers a good protection from electromagnetic interferences in a large wave band.